

## Ventilation unit

## Zehnder ComfoAir 200

### Use

The Zehnder ComfoAir 200 comfort ventilation unit was developed for use in residential settings with high ventilation demand. It combines maximum comfort, simple operation and high efficiency with flexible integration into building services. The ComfoAir 200 ventilation unit moves max. 118 cfm of air at an external pressure of 0.40" WC.

### Efficiency

The integrated cross-counterflow heat exchanger achieves efficiencies of > 90%. For user comfort this means no unpleasant draft effects, because the supply air is heated almost to room temperature even when external temperatures are around freezing.

### Fans

The supply and extract fans are driven by high efficient DC motors. Differential pressures in the supply and extract air distribution systems can be compensated thanks to direct control. The especially quiet fans can be adjusted to the required volumetric flow in 1% increments. The air volumes of the selectable stages can be set to between 29 cfm and 118 cfm on the Zehnder ComfoAir 200.

### Filters

The ComfoAir 200 ventilation unit is equipped with a class G4 filter (MERV 7/8). An optional F7 pollen filter (MERV 13) is available for outside air.

### Installation

The Zehnder ComfoAir 200 ventilation unit is characterised by its compact design. The supply and extract air connections are located on the top of the unit, those for the outside and exhaust air are on the bottom. The ventilation unit is suitable for ceiling and wall installation.

### Operation

The ComfoAir 200 is controlled by the ComfoSense control unit. This unit is usually installed in the Living area. The remote control units are installed in the bath rooms.


### Servicing

Servicing of the Zehnder ComfoAir CA 200 ventilation unit is limited to regular replacement and cleaning of the filter integrated in the front of the unit. The heat exchanger should be cleaned every 3-4 years depending on the dirt load of the outside air.

Please see the unit manual for additional servicing tasks.



OK



ComfoSense Controller



Remote-controlled unit

## Ventilation unit

## Zehnder ComfoAir 200

### Frost protection

When the ventilation unit is operated without preheating, the condensate in the extract air may freeze. The frost protection setting prevents this by variably reducing the supply air volume. In order to ensure reliable operation even at extreme outside temperatures, an optional integrated, electrical preheater register is available.

---

### Bypass

During summer nights and in the transition periods with strong sunshine, living areas often become too warm, while the outside air remains pleasantly cool. In this case heat removal by what is known as *free cooling* helps: The cooler outside air is fed to the rooms in the living area, bypassing the heat exchanger. The Zehnder ComfoAir 200 ventilation unit is equipped with an automatic bypass for just this purpose. The bypass is a standard component and takes 100% of the extract air past the heat exchanger. The personal comfort temperature is adjustable.

---

### Options

- **Wireless remote control**  
More installation freedom. Using the Zehnder wireless remote control, the ventilation unit can be controlled from several switching points throughout the house.
- **Chimney sweep control**  
The ventilation system can be installed in a home with an open flue fireplace. This must be registered in the control unit to prevent a controller-related negative pressure. In a frost protection situation both fans are stopped. Supply or extract ONLY mode is not possible.

## Ventilation unit

# Zehnder ComfoAir 200

### Technical specifications

#### Unit dimensions

Max. air volume	118 cfm
Min. air volume	29 cfm
Height	47.25"
Width	21.40"
Depth	12.50"

#### Benefits

- Comfort ventilation up to 118 cfm
- Heat recovery with an efficiency > 90%
- Low energy consumption thanks to EC direct current motors
- Automatic 100% summer bypass
- Infinitely variable frost protection function: efficient even at low temperatures
- Quick, safe installation and servicing
- Simple operation
- Integrated preheater (optional)
- Controls can be expanded by wireless remote control
- Digital control unit: ComfoSense
- CO2 control (optional)
- With weekly timer as standard
- Chimney sweep control

ComfoAir 200 L Luxe  
ComfoAir 200 R Luxe  
ComfoAir 200 VL Luxe  
ComfoAir 200 VR Luxe  
ComfoAir 200 L Luxe Enthalpy

#### Article numbers

L = supply air left, R = supply air right, VV = integrated electric preheater

Product	Article number	Ref. no.
ComfoAir 200 HRV L	471 226 710	9280
ComfoAir 200 HRV R	471 226 715	9276
ComfoAir 200 HRV VV L	471 226 730	9282
ComfoAir 200 HRV VV R	471 226 735	9338
ComfoAir 200 ERV L	471 226 840	9357
ComfoAir 200 ERV R	471 226 845	9364
ComfoAir 200 ERV VV L	471 229 470	9422
ComfoAir 200 ERV VV R	471 229 475	9423

#### Accessories

ComfoSense control unit	9257
Wireless remote control	9238

#### Filters

Filter for ComfoAir 200 G4 (MERV 7/8)	400 100 014	9282
Filter for ComfoAir 200 F7 (MERV 13)	400 100 013	9283

### Functions

- Frost protection function/automatic defrost
- Supply and extract air separate and infinitely variably programmable
- Switch on and off delay for bathroom switch
- Adjustable comfort temperature
- Filter replacement indicator
- Supply and extract air can be switched off separately

### Description

#### Comfort ventilation unit ComfoAir 200 Luxe

The Zehnder ComfoAir 200 is a centralised, compact ventilation unit with heat recovery and integrated summer bypass. This ventilation unit is suited to new construction as well as for renovation projects. The ComfoAir 200 can be installed as a wall-hanging unit or to be mounted under the ceiling. It is connected by 4 DN 5"/6"/6.3" pipe connections on the top and bottom of the unit. The housing, made of galvanised or painted steel, is sound absorbing and thermally insulated. EC (direct current) fans guarantee energy-saving operation and high electrical efficiency. Supply and exhaust fans can be controlled separately and can be precisely adjusted to balance the air volume within one percent. The core of the ComfoAir 200 is a cross-counterflow heat exchanger with an efficiency of > 90% heat recovery. It is controlled by the ComfoSense unit. All operating status and error messages will be displayed on the control unit. The ComfoAir 200 is equipped with a grounded plug. The filters can be easily replaced from the front of the unit without opening the housing.

#### Options:

- Integrated electrical preheater (CA 200 VVL and CA 200 VVR)
- Wireless remote control (3 stages and intermittent ventilation)
- Class F7 (MERV 13) pollen filter available

#### Controller features:

- Automatic frost protection
- Timer-controlled filter servicing display
- Automatic and temperature-controlled 100% summer bypass
- Fault history including the last three error messages
- Separate control of supply and extract fans.
- Connection option for external ventilation switch
- Comfort temperature controller
- Chimney sweep control
- Weekly timer programmes

## Ventilation unit


## Zehnder ComfoAir 200

### Descriptions

#### Technical specifications

Heat exchanger:	Plastic
Fans:	EC (direct current) radial fans
Filters:	Extract air/Outside air: G4 (MERV 7/8) optional F7 (MERV 13) pollen filter
Condensate connection:	20 mm
Air duct connections:	2x top, 2x bottom DN 5"/6"/6.3"
Electrical connection:	230 V, 50-60Hz
Temperature range:	44.6 °F to 104 °F
Acoustic performance (min./max.):	Extract air 30 dB(A)/57 dB(A) Supply air 36 dB(A)/73 dB(A)
Heat recovery:	> 90%
Volumetric flow:	Maximum 150 cfm at 0.50" WC external Minimum 29 cfm at 0.02" WC external
Power consumption:	Maximum 143 Watt Minimum 9 Watt
Dimensions:	Height: 43.5" (with connections: 47.3") Width: 21.4", Depth 12.7"
Weight:	6.2 lb


### Air direction

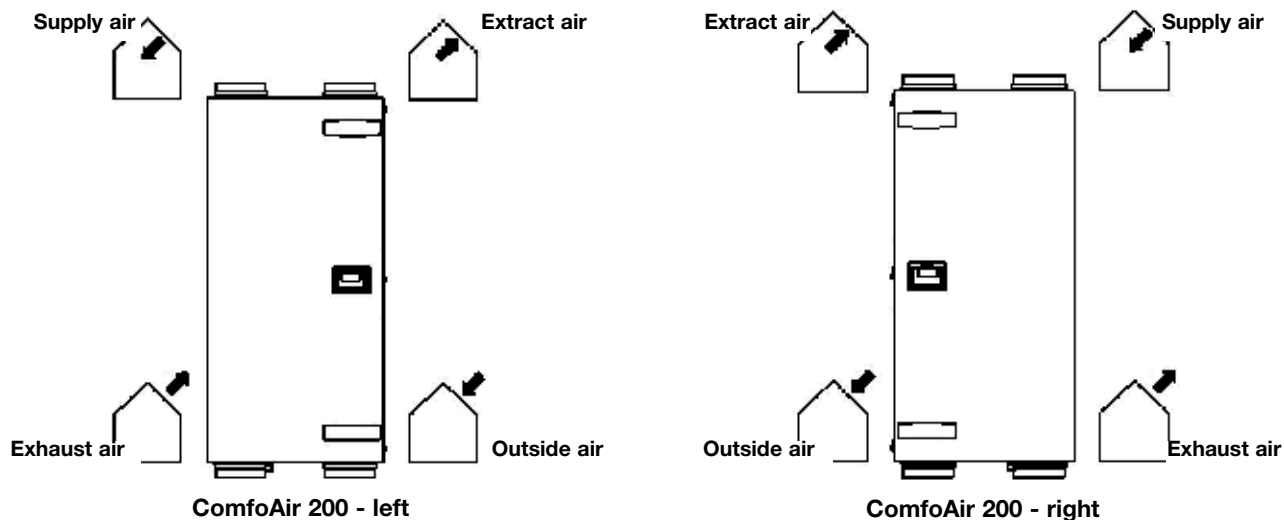

Ventilation unit

**Zehnder ComfoAir 200**

Dimensions

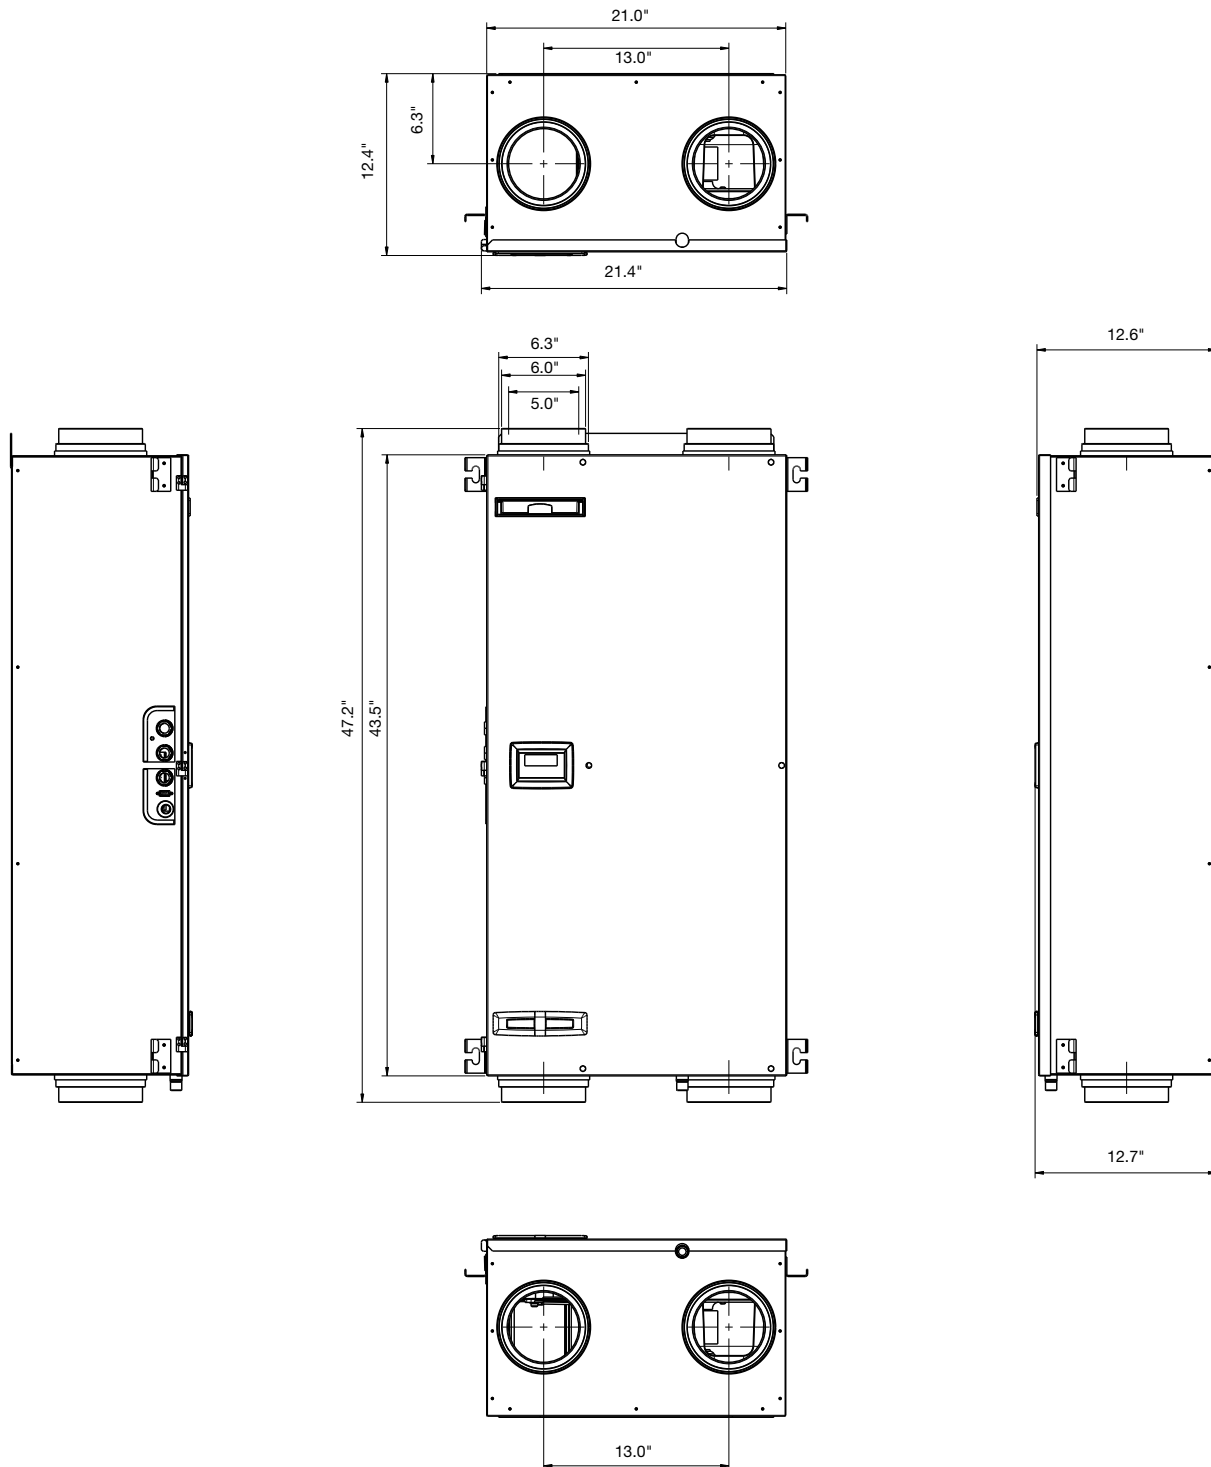


Ventilation unit

**Zehnder ComfoAir 200**

Stage	Setting	Capacity	Pressure	Power consumption	Current consumption	COS $\phi$ (-)	Installed noise level		Weight lb
	Percent	Qv	$\Delta P_{st}$	W	A		Extract air	Supply air	
	%	cfm	" WC				dB(A)	dB(A)	

Zehnder ComfoAir 200

(1)	15%	12	0.012	9	0.08	0.48	30	36	66.2
(2)	30%	35	0.028	14	0.11	0.54	35	46	
(3) Low	40%	53	0.060	20	0.16	0.55	37	53	
(4)	50%	71	0.120	30	0.25	0.52	43	59	
(5)	60%	91	0.180	46	0.37	0.55	47	63	
(6) Medium	70%	109	0.281	68	0.55	0.54	51	66	
(7)	80%	127	0.402	98	0.77	0.55	54	69	
(8) High	90%	144	0.482	128	0.99	0.56	56	72	
(9) Maximum	100%	150	0.502	143	1.1	0.57	57	73	

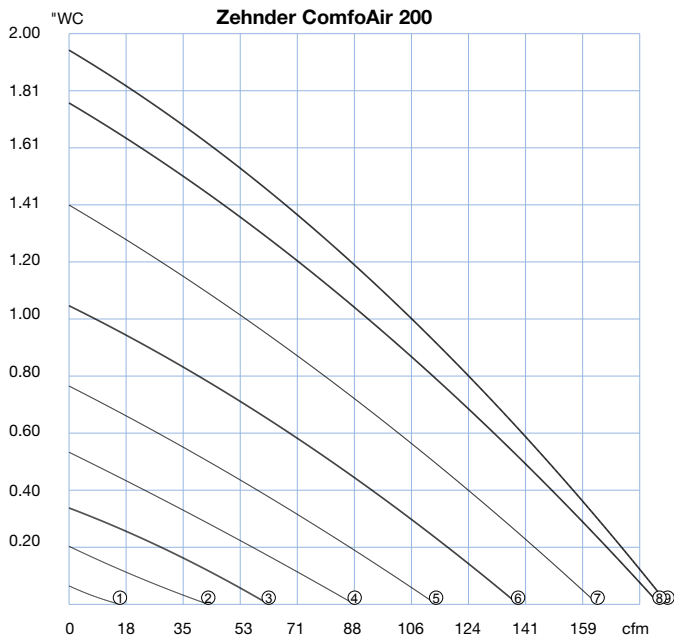

## Sound, supply air

Ventilation unit Type	Speed	Acoustic performance						
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
ComfoAir 200	1	41.1	39.6	35.2	30	20.8	12.9	8.7
ComfoAir 200	2	50.3	48.8	44.4	39.2	30	22.1	17.9
ComfoAir 200	3	56	54.8	50.7	48.3	39.4	33.7	24.6
ComfoAir 200	4	61.3	60.4	54.7	54.9	46.1	42.2	35.7
ComfoAir 200	5	66.5	65.4	58.1	58.6	51.8	48.1	43.5
ComfoAir 200	6	69.4	69.3	61.1	61.1	56.5	52.5	49
ComfoAir 200	7	73.2	72.2	63.8	63.4	60.9	56.4	53.6
ComfoAir 200	8	74.9	75.2	66.2	64.9	64	59.1	57
ComfoAir 200	9	75.9	75.9	67.5	65.7	64.8	60.1	58.1

## Sound, extract air

Ventilation unit Type	Speed	Acoustic performance						
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
ComfoAir 200	1	43.4	35.2	18.4	12.8	3.2	7.3	14.9
ComfoAir 200	2	47.6	39.4	22.6	17	7.4	11.5	19.1
ComfoAir 200	3	47.5	43.6	28.2	24.7	11.5	11.5	19
ComfoAir 200	4	52	50.1	33.1	31.2	17.4	12.4	18.7
ComfoAir 200	5	57	53.4	39.9	34.4	22.8	14.5	18.8
ComfoAir 200	6	60.1	58	40.6	37	27.3	18.4	19.2
ComfoAir 200	7	63.1	60.8	41.7	38.5	30.5	22.2	19.6
ComfoAir 200	8	65.1	62.8	44.9	40.4	33.3	25.9	20.3
ComfoAir 200	9	65.2	63.9	46.3	41.3	34.3	27.3	21

## Sound, unit emission

Ventilation unit Type	Speed	Acoustic performance					db(A)
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	
ComfoAir 200	2	28.5	35.2	23.1	14.5	10.5	23.9
ComfoAir 200	3	34.6	39.4	27.3	19.8	11.8	29.1
ComfoAir 200	4	40.3	43.6	32.4	24.9	18.9	34.6
ComfoAir 200	5	45.3	50.1	35.6	28.7	24.5	39
ComfoAir 200	6	46.8	53.4	43.5	31.9	28.5	43.3
ComfoAir 200	7	49.7	58	41.4	34.1	31.9	44.3
ComfoAir 200	8	52.3	60.8	43.6	36	34.6	46.7
ComfoAir 200	9	53.8	62.8	44.7	36.7	35.5	47.9



## Certificate

**Certified Passive House Component**  
For cool, temperate climates, valid until 31 December 2014

Category: **Heat recovery unit**

Manufacturer: **Zehnder Group Nederland B.V.**  
**8028 PM Zwolle, NETHERLANDS**

Product name: **ComfoAir 200, ComfoD250, WHR920**

**This certificate was awarded based on the following criteria:**

Thermal comfort	$\theta_{\text{supply air}} \geq 16.5 \text{ °C}$ at $\theta_{\text{outdoor air}} = -10 \text{ °C}$
Effective heat recovery rate	$\eta_{\text{HR,eff}} \geq 75 \%$
Electric power consumption	$P_{\text{el}} \leq 0.45 \text{ Wh/m}^3$
Airtightness	Interior and exterior air leakage rates less than 3 % of nominal air flow rate
Balancing and adjustability	Air flow balancing possible: <b>yes</b> Automated air flow balancing: <b>no</b>
Sound insulation	Sound level $L_w \leq 35 \text{ dB(A)}$ not met Here $L_w = 49.0 \text{ dB(A)}$ Unit should be installed so that it is acoustically separated from living areas
Indoor air quality	Outdoor air filter F7 Extract air filter G4
Frostprotection	Frost protection for the heat exchanger with continuous fresh air supply down to $\theta_{\text{outdoor air}} = -15 \text{ °C}$

Further information can be found in the appendix of this certificate.

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
GERMANY

**Certified for air flow rates of**

**60 – 150 m<sup>3</sup>/h**

**$\eta_{\text{HR,eff}}$**

**92 %**

**Electric power consumption**

**0.42 Wh/m<sup>3</sup>**

**CERTIFIED COMPONENT**  
Passive House Institute

[www.passivehouse.com](http://www.passivehouse.com)

0327vs03

ZA-CSY-FLYERTS106, V11 2014, en\_us, subject to changes